




ENERGY RECOVERY UNIT

HERU® 140 LP EC -Standard

Features and benefits:


- ✓ Energy recovery unit with low profile and side connections
- ✓ Rotary heat exchanger with heat recovery efficiency up to 88%, free of maintenance
- ✓ Comes with Pre-filter G4, Carbon, E12 (PM 0.1 $\geq 99.5\%$) for supply air, E12 for Exhaust air
- ✓ Wall-controller can monitor the PM2.5, Temperature, Humidity in Standard version, With Auto-module controlled by PM2.5

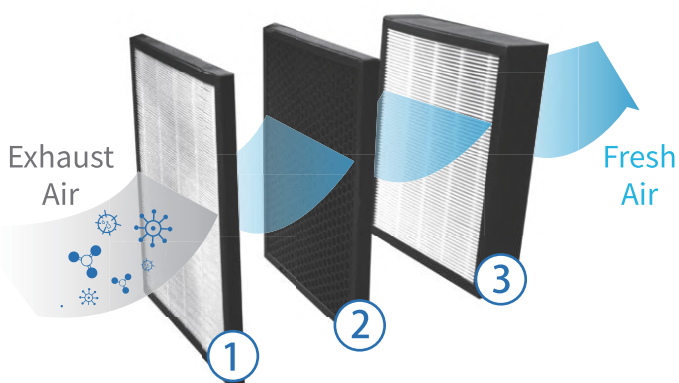

3- layers of filtering

- ① **Pre-filter G4**
Effective filtration for large granular dust, pollen, allergens and other pollutants
- ② **Carbon Filter**
Adsorption of odors in the air, such as smoke, ammonia, etc.
- ③ **E12 High efficient filter**
Filtration rate for PM 0.1 pollutants is above 99.5%

Dimensions (mm)

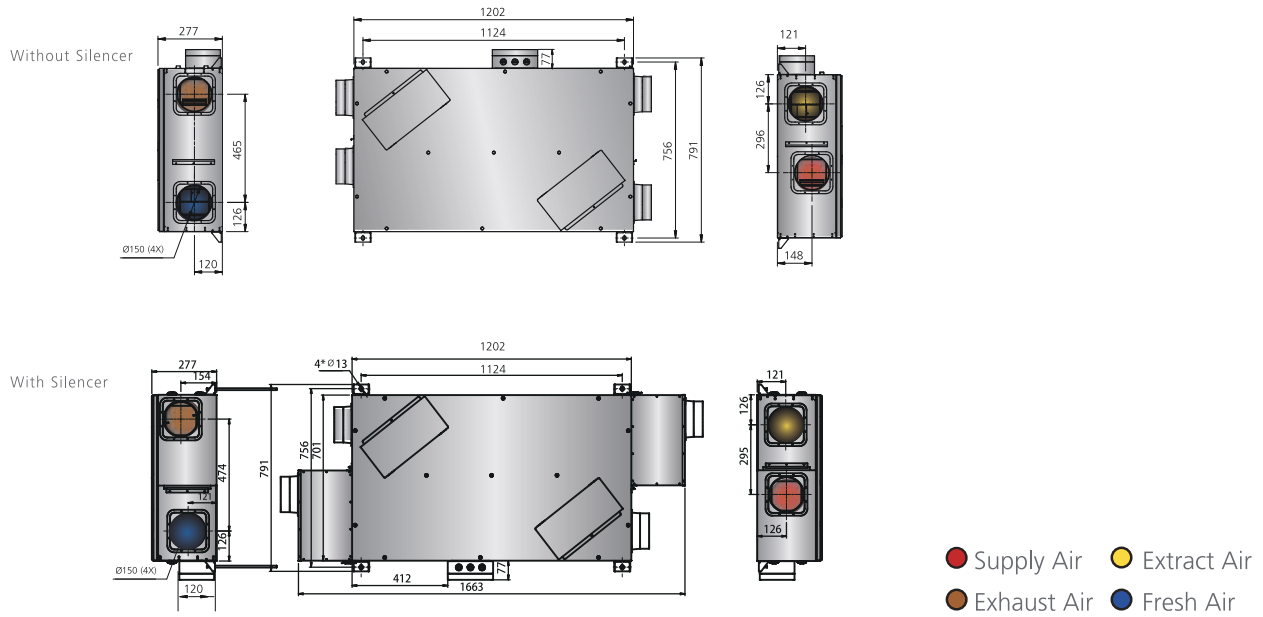

Technical Data

Number	1008010052
Dimensions	1202*701*277 mm
Weight	66 KG
Max Flow	580 m ³ /h
Max Pressure	765 Pa
Sound	43 dB(A)
Voltage	230/50/60 V/Hz
Power	412 W

HERU ® 140 LP EC

